

# BEKA RUBBER



Flooring that meets your needs



Technical Data Sheet: BeFit Pro Flex  
Revision: Dec 2021

## BeFit Pro Flex

**BeFit Pro Flex** rubber tiles bring recycled rubber to a whole new level. A revolutionary production method delivers outstanding results and sets new standards for indoor rubber tiles: **ZERO** tolerance for dimensions (0,09%).

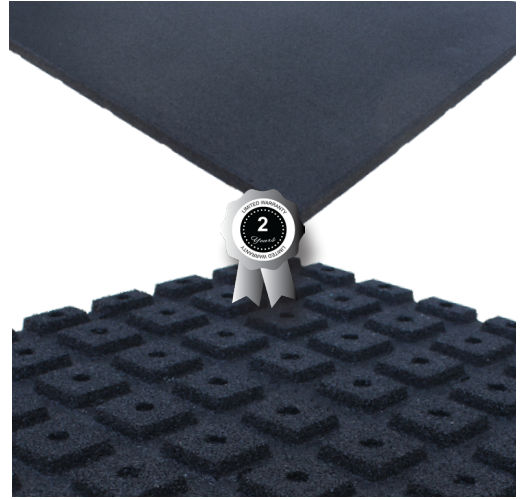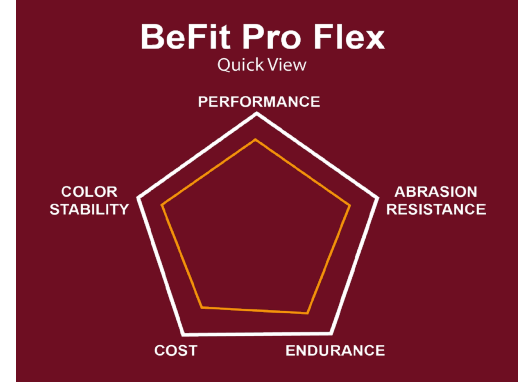

### COMPOSITION

Recycled SBR Rubber, MDI polyurethane bonding agent

### SPECIFICATIONS

Ideal for Fitness centers, personal training centers, Functional training centers, etc.

Usage	Indoor
Size	100 x 100 cm
Thickness	25mm / 30mm
Color	■
Surface	Porous, soft, smooth
Density	950-980 kgs/m <sup>3</sup>
Weight/m <sup>2</sup>	23 kg (25 mm) / 27 kg (30 mm)
Hardness	60 ± 3 Shore A
Tolerance (Dimensions / Thickness)	0,05% / 0,05%

Beka Spor Zeminleri Ins. San. Ve Dış Tic. Ltd. Sti.  
Orta Mh. Tevfik İleri Cd. Ördekçioğlu İş Mrk. No:32 K:1 D:1,  
34896 Pendik – İstanbul – Turkey  
+90 850 480 2352 – info@bekasport.com



MADE IN  
TURKEY



# BEKA RUBBER

Flooring that meets your needs

Technical Data Sheet: BeFit Pro Flex  
Revision: Dec 2021

## APPLICATION AREAS





Depending on the thickness selected, Indoor climbing wall areas, fitness facilities, Functional training centers, Personal Training Studios, Crossfit Boxes, etc.

## THICKNESS

BeFit Pro Flex	BeFit Pro Flex
25 mm	30 mm
Areas where power lifting is involved, and a great deal of dropped weights around 120 - 160 kgs on a regular basis. This thickness offer higher cushion and more sound isolation.	Ideal for Professional Crossfit Boxes, where weights go easily over 150 kgs. Especially, for places where higher sound isolation is imperative, these 30 mm offer much better sound deadening.

## CERTIFICATIONS

Fire Resistance	Efl (B2)a,c (EN 13501)
Reaction to Fire	Fs <150 mm in 20 seconds (ISO 11925)
Impact Sound Insulation	26 dB (ISO 10140)
Airborne Sound Insulation	48 dB (ISO 10140)
Abrasion Resistance	0,43 gr (ISO 5470-1)

-  **High impact resistance**
-  **Superb acoustic isolation**
-  **Easy cleaning and maintenance**
-  **Superior performance**

The product data sheet is not subject to any change service!  
All information is without guarantee.

You can find the latest version of this document on the relevant product page at [www.bekarubber.com](http://www.bekarubber.com).

Beka Spor Zeminleri Ins. San. Ve Dış Tic. Ltd. Sti.  
Orta Mh. Tevfik İleri Cd. Ördekçioğlu İş Mrk. No:32 K:1 D:1,  
34896 Pendik – İstanbul – Turkey  
+90 850 480 2352 – [info@bekasport.com](mailto:info@bekasport.com)



MADE IN  
TURKEY

