

BEKA RUBBER

Flooring that meets your needs

Technical Data Sheet: BeRoll Dynamic
Revision: Feb 2024

BeRoll Dynamic



BeRoll Dynamic is our rubber roll for those who are on a tighter budget. Reliable and cost effective, meet **Dynamic Series**, one of our best selling products.

COMPOSITION

Fine Recycled SBR granule and MDI polyurethane bonding agent.

SPECIFICATIONS

Usage	Indoor / Outdoor
Size	1000 x 120 cm 1500 x 120 cm 2000 x 120 cm
Thickness	3mm-10mm
Weight	0,97kg/m ²
Color	■
Surface	Slightly porous, soft and smooth
Density	950-970 kgs/m ³
Thickness tolerance	5%

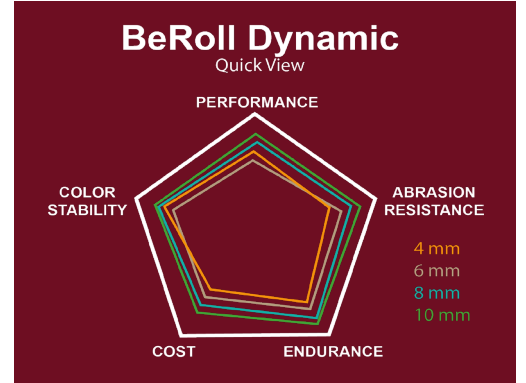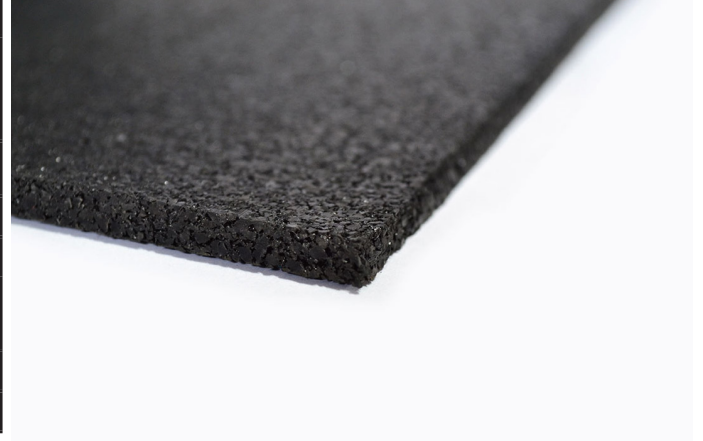

APPLICATION AREAS

BeRoll Dynamic has wide application range: protective cover for other flooring (exhibitions, etc.), sub-base for multipurpose areas and tennis courts, acoustic insulation for construction purposes, underlay material for sound absorption purposes (laminated, wood, etc), under linoleum, gym flooring, etc.

PROPERTIES

Fire Resistance	Class E (DIN EN 13501-1, 2010)
Chemical Resistance	Conditionally resistant to acids and bases
Cold Fracture Resistance	24 hours / -20° C, no fracture
Cold Cracking Resistance	5 hours / -15° C, no crack
Temperature range	-30°C to 80°C (internal tested)

This TDS is for information purposes only and Beka Sport may change the specifications of this TDS without prior notice. Beka Sport will not be responsible for any misuse of this TDS. The latest version of this TDS can be found on the website www.bekarubber.com.

Beka Spor Zeminleri San. Ve Dış Tic. Ltd. Sti.
Orta Mh. Tevfik İleri Cd. Ördekçioğlu İş Mrk. No:32 K:1 D:1,
34896 Pendik – İstanbul – Turkey
+90 850 480 2352 – info@bekasport.com

